

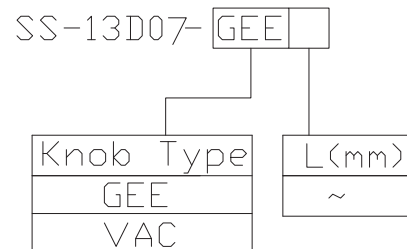


RoHS

MODEL CODE

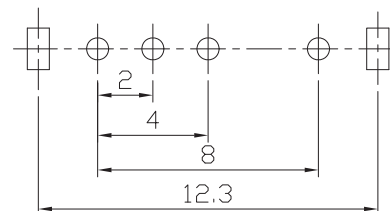

CIRCUIT DIAGRAM

P.C.B LAYOUT
BOTTOM VIEW

Height(高度) :

NO.1	
PART NO	L
	X

Main technical specifications:

Rated load(额定负荷):	DC 50V 0.3A		
Contact impedance(接触阻抗):	≤100mΩMAX		
Insulation impedance(绝缘阻抗):	≥100MΩMIN		
TIMING	NON-SHORTING		
OPERATING LIFE (电气寿命):	100,000 cycles		
Usage temperature (使用温度):	-25 °C to 85 °C		
CIRCUIT	1P3T		
Trip(行程):	2±0.2mm		
Operating force(操作力):	1	2	250±100g
	3	4	
	5	6	

public errand (公差) : ±0.2mm unit (单位) : mm

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME	SWITCH			DRAWING	G.L CHEN	DWG.No.	LCZY
PART NO.	SS-13D07			CHECK	Z.LIU	REV.	A1
UNIT : mm	TOLERANCE OTHERWISE	UP TO 5	±0.2	ANGLE	APPROVAL	DATE	SS-09-2019
		ABOVE 5 ~30	±0.3				
mm	OTHERWISE	ABOVE 30	±0.5	0°±3°	SCALE	PAGE	1 OF 1
		ANGLE	±3°				

SS-13D07-□