





RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.


DIMENSIONS

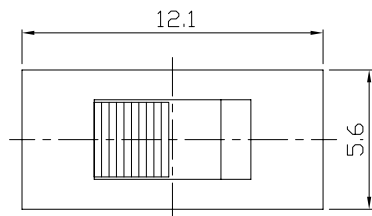

MODEL CODE

SS-12F44-GBG

Knob Type	L(mm)
GBG	~
VAA	~

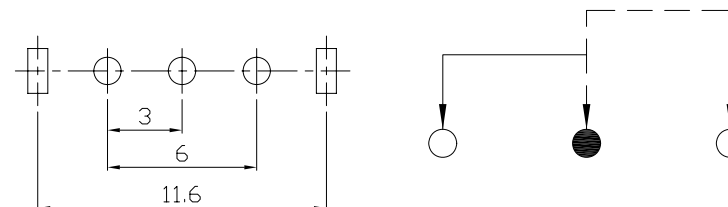



P.C.B LAYOUT BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.5A 50V DC
CIRCUIT	1P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	3.2mm
OPERATING FORCE	180±80gf
OPERATING LIFE(cycles)	10,000

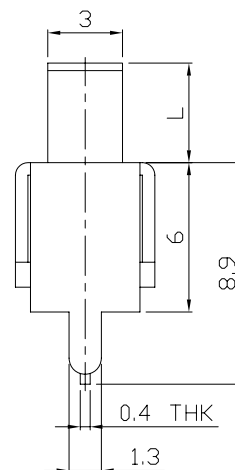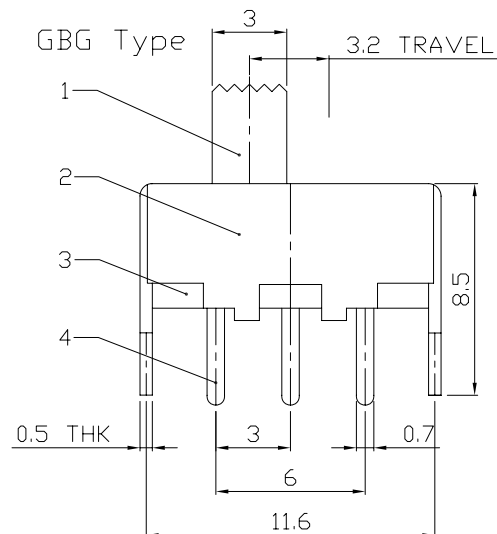

8					WITHIN 1.5mm: ±0.1mm	UNITS mm	LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD								
7					OVER 1.5mm: ±0.2mm	MAT'L									
6	SPRING	STEEL WIRE	1	NATURAL		SEE NOTE	TITLE:		PART NO:						
5	CONTACT	BRASS STRIP	1	Ag PLATED			SLIDE SWITCH / VERTICAL		SS-12F44						
4	TERMINAL	BRASS STRIP	3	Ag PLATED			FINISH	DR:		2015/07/09		DWG NO:			
3	CASE	PHENOLIC RESIN	1	NATURAL			SEE NOTE	CHKD:		2015/07/09		ADL-12F44			
2	FRAME	STEEL STRIP	1	Ni PLATED			Q'TY	APPD:				SCALE	SHEET	REV.	CUSTOMER DRAWING
1	KNOB	POM	1	BLACK								4:1	1/1	A	
NO.	PARTS	MATERIAL	Q'TY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.										

THESE DRAWINGS AND SPECIFICATIONS ARE
THE PROPERTY OF ACCURATE INNOTECH INC.
AND SHALL NOT BE REPRODUCED, COPIED
OR USED IN ANY MANNER WITHOUT THE
PRIOR WRITTEN CONSENT OF ACCURATE
INNOTECH INC.