

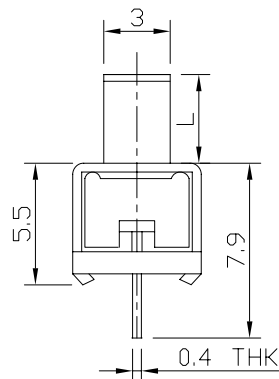
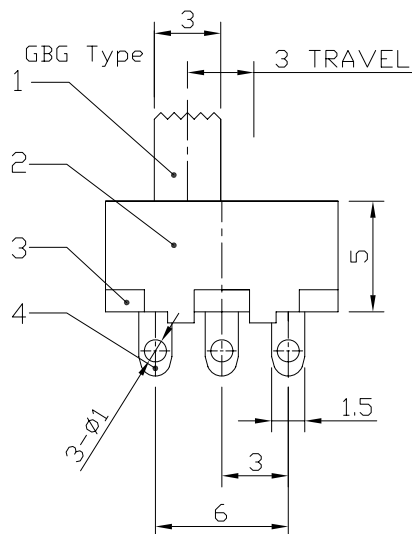




RoHS
Compliant
2002/95/EC

DIMENSIONS




MODEL CODE


SS-12F33-GBG

Knob Type
GBG
VAA

L(mm)
~



P.C.B LAYOUT
BOTTOM VIEW



CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.5A 50V DC
CIRCUIT	1P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NO SHORTING
TRAVEL	3mm
OPERATING FORCE	180±80gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm	UNITS mm	LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD							
7					OVER 1.5mm: ±0.2mm	MAT'L								
6	CONTACT	BRASS STRIP	1	Ag PLATED			SEE NOTE	TITLE: SLIDE SWITCH / VERTICAL			PART NO.: SS-12F33			
5	SPRING	STEEL WIRE	1	NATURAL										
4	TERMINAL	BRASS STRIP	3	Ag PLATED			FINISH	DR: 2015/05/22			DWG NO.: ADL-12F33			
3	BASE	PHENOLIC RESIN	1	NATURAL										
2	FRAME	STEEL STRIP	1	BLACK	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.									
1	KNOB	POM	1	BLACK										
NO.	PARTS	MATERIAL	Q'TY	FINISHING			APPD:				3:1	1/1	A	CUSTOMER DRAWING