





RoHS
Compliant
2002/95/EC



REV.	ECN.	NO.	APPD.

DIMENSIONS

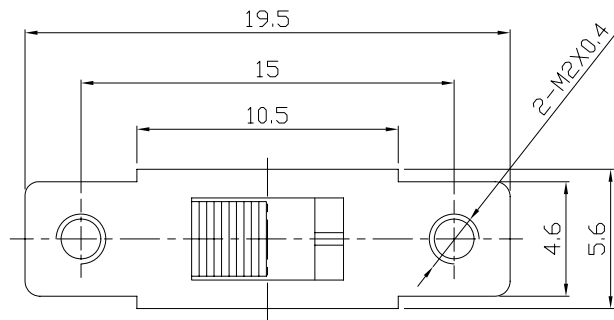

MODEL CODE

SS-12F16-	GBG
Knob Type	L(mm)
GBG	~
VAA	





P.C.B LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

Refer to additional specifications

RATING	
CIRCUIT	1P2T
CONTACT RESISTANCE	MAX.
TIMING	NON-SHORTING
TRAVEL	3mm
OPERATING FORCE	180±80gf
OPERATING LIFE(cycles)	10,000

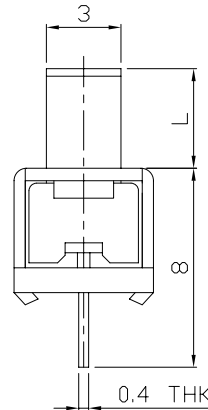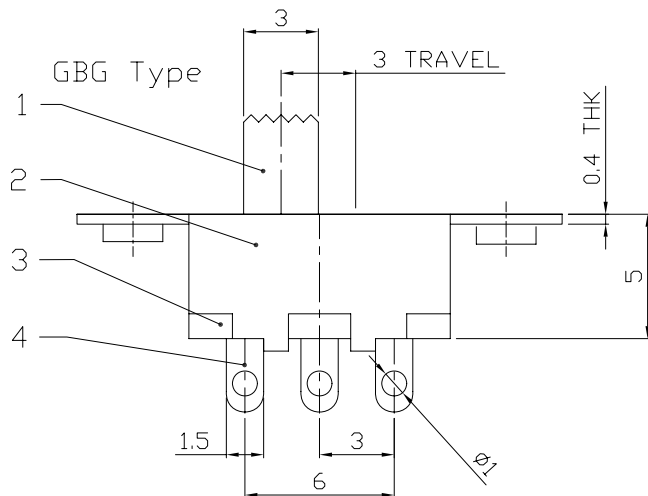

8					WITHIN 1.5mm: ±0.1mm	UNITS mm	LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD				
7					OVER 1.5mm: ±0.2mm	MAT'L					
6	SPRING	STEEL WIRE	1	NATURAL		SEE NOTE	TITLE:	PART NO.:			
5	CONTACT	BRASS STRIP	1	Ag PLATED			SLIDE SWITCH / VERTICAL	SS-12F16			
4	TERMINAL	BRASS STRIP	3	Ag PLATED			DR:	2015/07/08	DWG NO.:		
3	BASE	PHENOLIC RESIN	1	NATURAL			CHKD:	2015/07/08	ADL-12F16		
2	FRAME	STEEL STRIP	1	BLACK			APPD:		SCALE	SHEET	REV.
1	KNOB	POM	1	BLACK					3:1	1/1	A
NO.	PARTS	MATERIAL	Q'TY	FINISHING							CUSTOMER DRAWING