

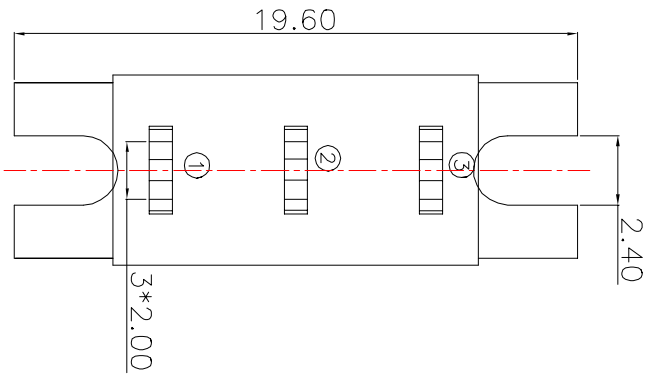
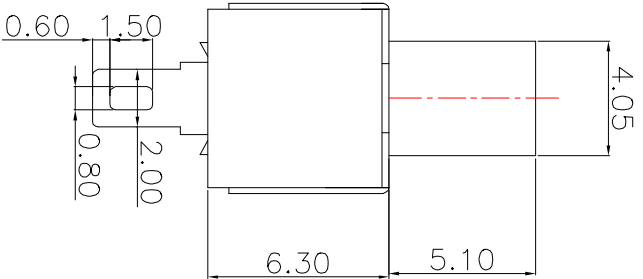
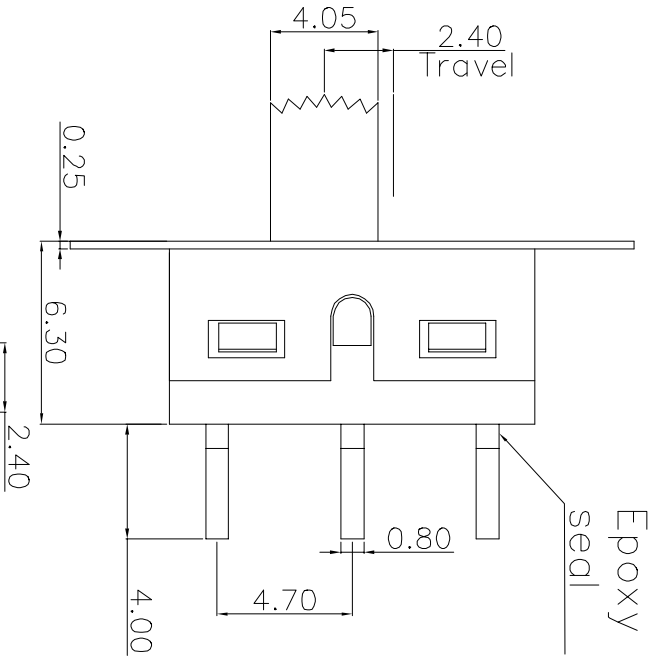


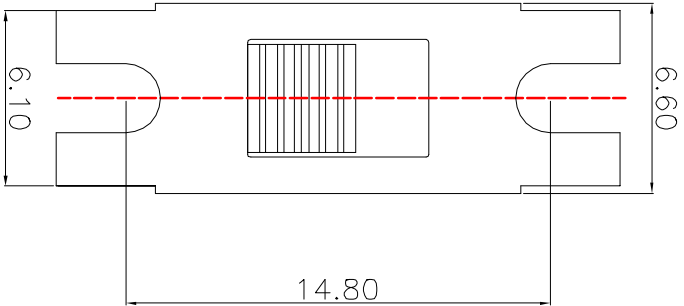

- Typical Specifications
1. Rating : 5A120V AC
 2. Insulation Resistance:1,000M min
 3. Dielectric Strength:1,500V RMS
 4. Operating Life : 30,000 cycles



Circuit Diagram

PART NO	
1	300±100

⑤	Terminal	—	4	Copper	Plating silver	—
④	Contact	—	1	F.Ag/C5210	—	—
③	Base	—	1	PA	Black	—
②	Cover	—	1	SPCC	Plating Sn	—
①	Keystoke	—	1	PA	RED	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS		DATE	LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD			
DRAWN		S.L.L	2019.11.03	Slide SWITCHS		
CHECKED		TITLE:		K3-1391A		
APPROVALS		PART NO.		PROJ: 1 OF 1		
TOLERANCES ARE		30~12.5	±0.30	ANGLE	UNIT: mm	SCALE: 1:1
		10~30	±0.20			
		5~10	±0.15			
		~ 5	±0.10	±2°	DRAWING NO.	SHEET 1 OF 1
ECN NO.	REV.	DATE.	NEW			
DESCRIPTION.		CHANGE.	CHECK.	APPRO.		