


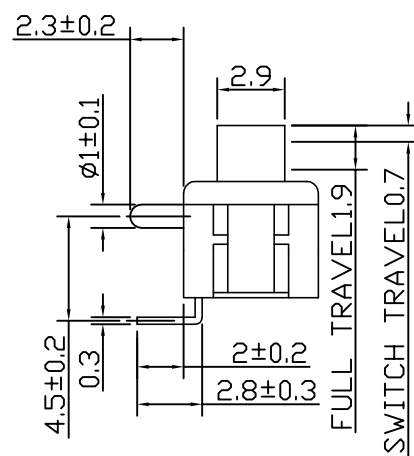

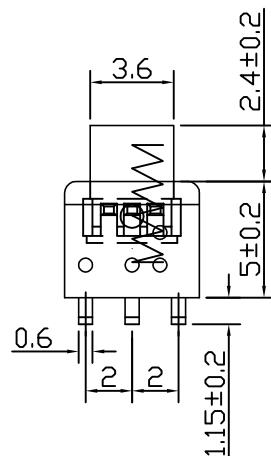



RoHS



SCHEMATIC



P. C. B LAYOUT

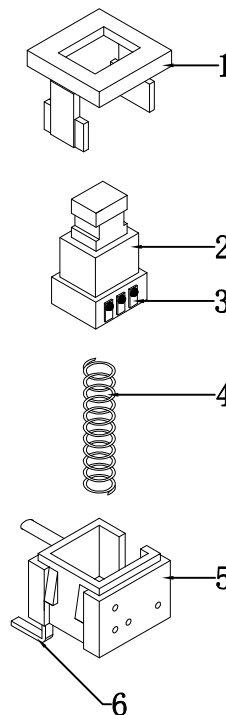

function(功能) :

NO.1	
PART NO	
L	自锁
N	无锁

Material:

8				
7				
6	TERMINAL	BRASS STRIP	3	Ag PLATED
5	CASE	PA66	1	GRAY
4	SPRING	SUS WIRE	1	NATURAL
3	CONTACT	PBS	1	Ag PLATED
2	KNOB	PA66	1	GRAY
1	COVER	PBT	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING

Main technical specifications:

Rated load (額定負荷):		DC 50V 0.5A	
Contact impedance (接触阻抗):		≤100mΩ MAX	
Insulation impedance (絶縁阻抗):		≥100MΩ MIN	
Welding resistance temperature (耐焊温度):		250±5 °5s	
OPERATING LIFE (电气寿命):		10,000 cycles	
Usage temperature (使用温度):		-25 °C to 80 °C	
Operating humidity (使用湿度):		≤85% RH	
Trip (行程):		2.0±0.2mm	
Operating force (操作力): NO.2	1	2	
	3	4	200±50gf
	5	6	

NO.2

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		SWITCH				DRAWING	G.L CHEN	DWG.No.	LCZY	
PART NO.		K8-5854DA				CHECK	Z.LIU	REV.	A1	
	UNIT :	TOLERANCE OTHERWISE	UP TO 5	±0.2	ANGLE	APPROVAL			DATE	K8-09-2019
	mm		ABOVE 5 ~30	±0.3		0'±3'			SCALE	

K8-5854DA- -

B

A