



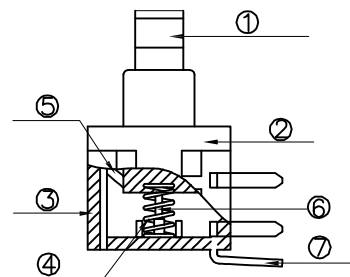
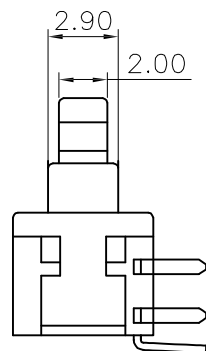
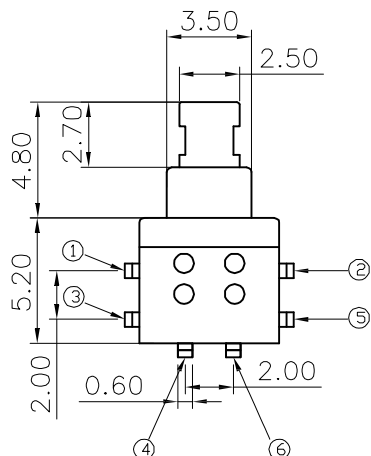


RoHS



PCB Layout (Pattern Side)

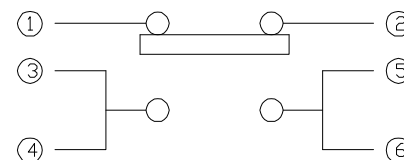

Circuit Diagram

function(功能) :

NO.1	
PART NO	
L	自锁
N	无锁

Material:

Button 按钮	POM
crochet hook钩针	不锈钢 (复银)
spring 弹簧	黄铜 (镀银)
Base 底座	PA66
Pin 引脚	铜 (镀银)
Upper cover上盖	PA66

Main technical specifications:

Rated load(额定负荷):	DC 30V 0.1A
Contact impedance(接触阻抗):	≤ 100mΩ MAX
Insulation impedance(绝缘阻抗):	≥ 100MΩ MIN
Welding resistance temperature(耐焊温度):	250 ± 5 ° 5s
OPERATING LIFE (电气寿命):	10,000 cycles
Usage temperature (使用温度):	-25 to 80
Operating humidity (使用湿度):	≤ 85% RH
Trip(行程):	2.0 ± 0.3mm
Operating force(操作力):	1 2 3 4 5 6 250 ± 100g

NO.2

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

public errand (公差) : ±0.2mm unit (单位) : mm

PART NAME		SWITCH		DRAWING		G.L CHEN		DWG.No.		LCZY	
PART NO.		K8-5851DCGL		CHECK		Z.LIU		REV.		A1	
UNIT :		TOLERANCE		UP TO 5		ANGLE		APPROVAL		DATE	
mm		OTHERWISE		ABOVE 5 ~ 30		0° ± 3°		SCALE		PAGE	
				±0.2				2:1		1 OF 1	
				±0.3							
				±0.5							
				±3°							

K8-5851DCGL - □ - □