




RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS

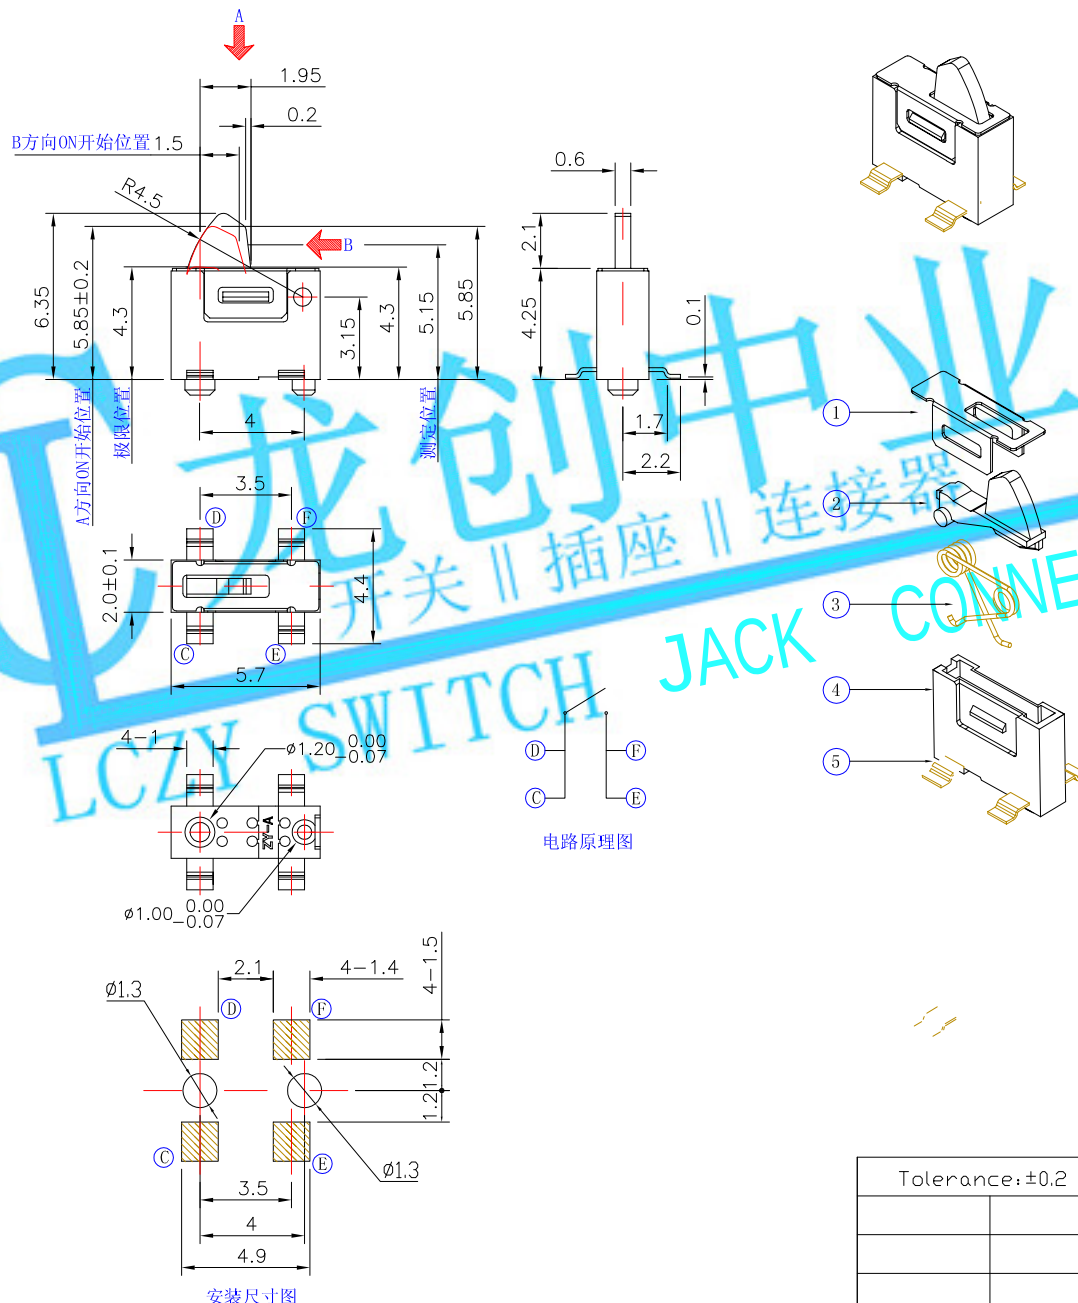

技术要求:

1. 额定负荷: DC 5V 0.1~1mA
2. 绝缘电阻: $\geq 100M\Omega$
3. 耐电压: AC100V 50Hz/1min
4. 电器寿命: 50000次
5. 环境温度: $-10^{\circ}\sim+60^{\circ}$
6. 相对湿度: $40^{\circ}\text{C} \leq 95\%$
7. 接触电阻: $\leq 100M\Omega$
8. 接触行程: 0.5 ± 0.2
9. 动作力: $\leq 0.3N(31gf)$
10. 各零件无明显飞边, 配合要紧, 不得有明显松动。
11. 未注公差尺寸均按GB1804-m级精度要求。

注: 图中*标记为重点检验项。

5	K5-1673SA-01-5.1	接触脚	4	黄铜		镀银
4	K5-1673SA-01-4.1	底座	1	PA		
3	K5-1673SA-01.3.1	弹簧	1	磷铜		镀银
2	K5-1673SA-01.1.1	手柄	1	PA		
1	K5-1673SA-01-2.1	盖子	1	不锈钢		
序号	代号	名称	数量	材料	单件重量	总计重量

Tolerance: ± 0.2		UNITS mm		LONGCHUANG ZHONGYE (HK) CO., LIMITED			
		MAT'L		TITLE: Detector Switch		PART NO.: K5-1673SA-01	
		SEE NOTE		DR: Ricky 2017/7/19		DWG NO.: K5-1673SA-01	
		FINISH		CHKD: Ricky 2017/7/19		SCALE	
		SEE NOTE		APPD:		SHEET	REV.
		Q'TY				1/1	A
						CUSTOMER DRAWING	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.