


DIMENSIONS

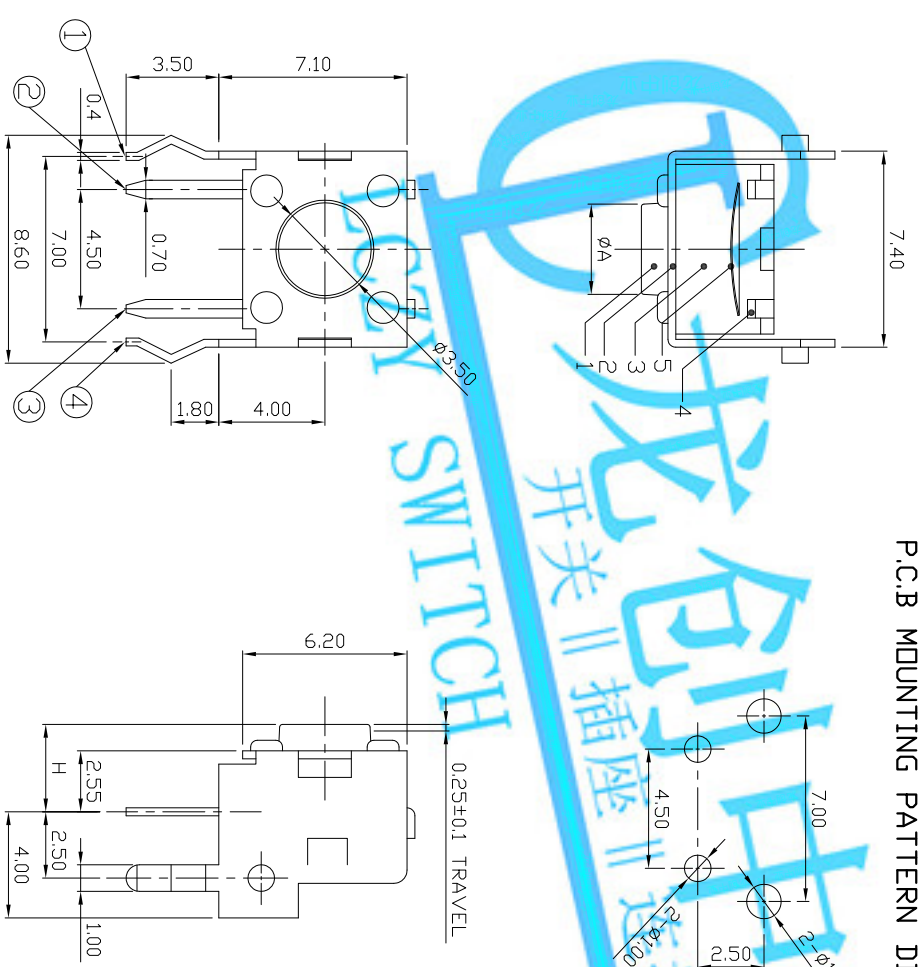

P.C.B MOUNTING PATTERN DIMENSION

CIRCUIT DIAGRAM

MODEL CODE

AT-1102V-

	H	φA
-	3.15	3.5
A	3.85	3.4
B	5.85	3.3
D	8.35	3.3
C	6.85	3.3
F	11.35	3.0
E	6.15	3.3
FL	11.85	3.0

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA	
Contact Resistance	100mΩ Max.	
Travel	0.25±0.1mm	
Operating Force	100/130/160/180±50gf	250±100gf
Operating Life(cycles)	100,000	

5	CONTACT	PBS	1	Ag CLAD	WITHIN 1.5mm:±0.1mm	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
4	TERMINAL	BRASS STRIP	2	Ag PLATED	OVER 1.5mm:±0.2mm	MAT'L	SEE NOTE				
3	CASE	NYLON+F.G	1	BLACK		FINISH	SEE NOTE				
2	COVER	STEEL STRIP	1	NI PLATED		DR:	2017/08/03				
1	KNDB	NYLON+F.G	1	BLACK		CHKD:	2017/08/03	DWG NO.:		AZJ-1102V	
ND	PARTS	MATERIAL	Q'TY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTECH INC.	Q'TY	APPD:	SCALE	SHEET	REV.	CUSTOMER DRAWING
1								4:1	1/1	A	
1											
1											