





RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS


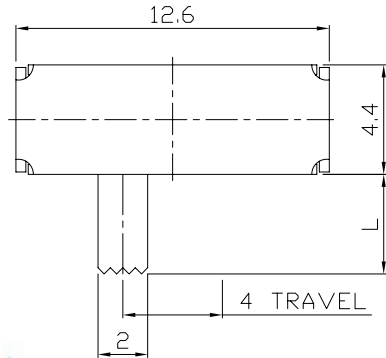


MODEL CODE

SK-12H01- GEE



Knob Type
GEE
VAC

L(mm)
~

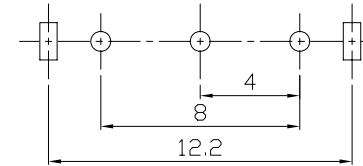

P.C.B LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

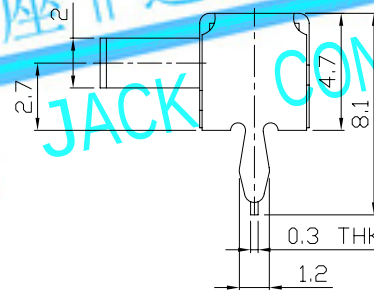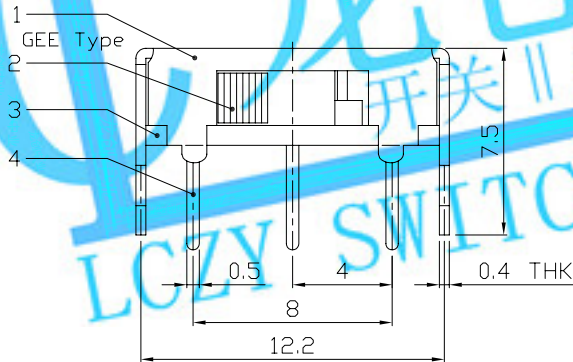

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	1P2T
CONTACT RESISTANCE	30mΩ MAX.
TIMING	NOT SPECIFIED
TRAVEL	4mm
OPERATING FORCE	200±100gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7					OVER 1.5mm: ±0.2mm	MAT'L				
6	SPRING PLATE	SUS	1	NATURAL		SEE NOTE	TITLE:		PART NO.:	
5	CONTACT CLIP	PBS C5210R-EH	1	Ag CLAD			SLIDE SWITCH / HORIZONTAL		SK-12H01	
4	TERMINAL	BRASS STRIP	5	Ag PLATED OVER Ni PLATED			DR: Ricky 2015/12/08		DWG NO.:	
3	BASE	PHENOLIC RESIN	1	NATURAL			CHKD: Ricky 2015/12/08		ADJ-12H01	
2	KNOB	POM	1	BLACK			APPD:		SCALE	SHEET
1	FRAME	STEEL STRIP	1	Ni PLATED					4:1	1/1
NO.	PARTS	MATERIAL	Q'TY	FINISHING					REV.	CUSTOMER
									A	DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

