






RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS

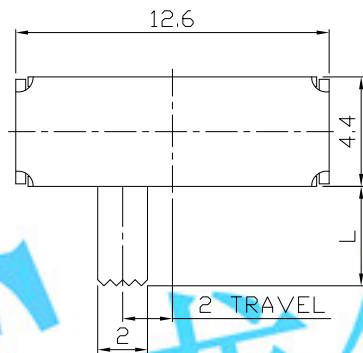


MODEL CODE


SK-13D01- GEE

Knob Type
GEE
GFB
VAC



L(mm)
~

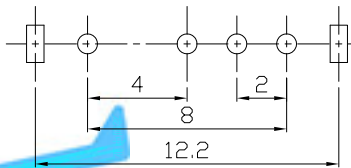

P.C.B LAYOUT
BOTTOM VIEW



CIRCUIT DIAGRAM

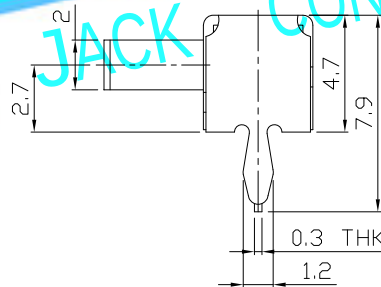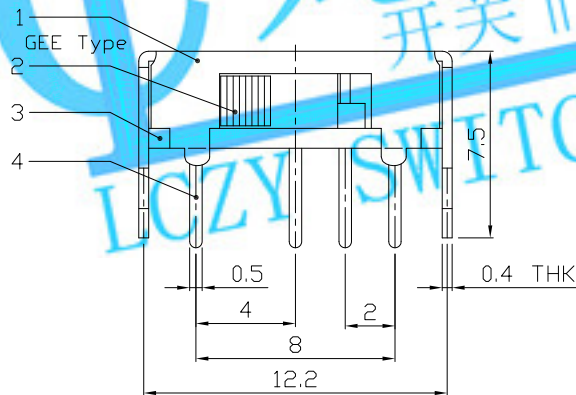

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	1P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED				
7					OVER 1.5mm: ±0.2mm	MAT'L					
6	SPRING PLATE	SUS	1	NATURAL		SEE NOTE	TITLE:		PART NO.:		
5	CONTACT CLIP	PBS STRIP	1	Ag PLATED			SLIDE SWITCH / HORIZONTAL		SK-13D01		
4	TERMINAL	BRASS STRIP	4	Ag PLATED			DR: Ricky 2016/06/23		DWG NO.:		
3	BASE	PHENOLIC RESIN	1	NATURAL			CHKD: Ricky 2016/06/23		ADL-13D01		
2	KNOB	POM	1	BLACK			APPD:		SCALE	SHEET	REV.
1	FRAME	STEEL STRIP	1	Ni PLATED					4:1	1/1	A
NO.	PARTS	MATERIAL	Q'TY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.				CUSTOMER DRAWING		