

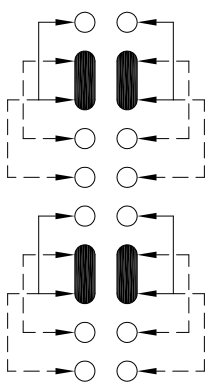


DIMENSIONS

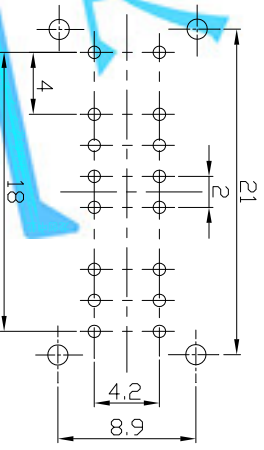

MODEL CODE

SK-43D03-GDB

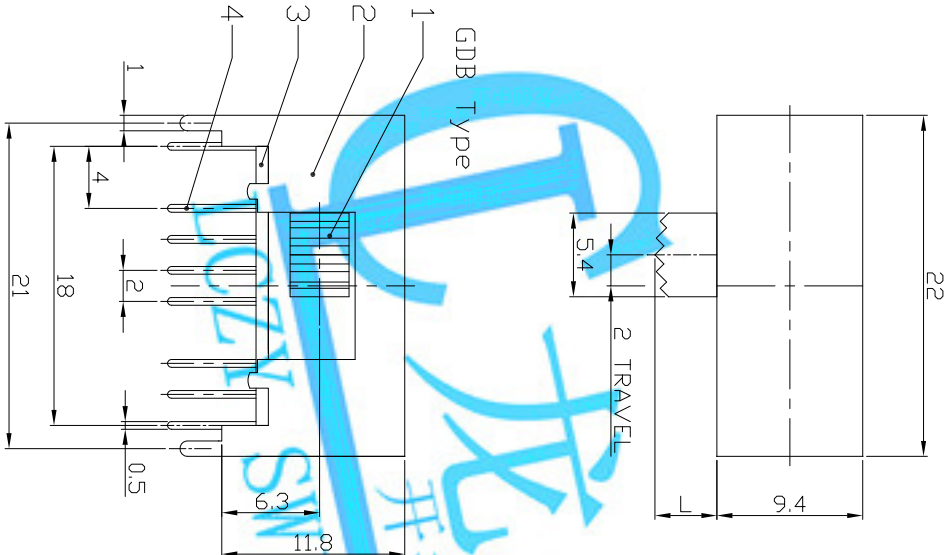

PCB LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS
Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	4P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	SHORTING
TRAVEL	2mm
OPERATING FORCE	300±100gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm OVER 1.5mm: ±0.2mm	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7	STEEL BALL	STEEL	1	NATURAL	MAT'L	SEE NOTE	TITLE: SLIDE SWITCH / HORIZONTAL PART NO.: SK-43D03 DWG NO.: ADL-43D03			
6	SPRING	STEEL WIRE	1	TEMPER	SEE NOTE					
5	CONTACT CLIP	PBS STRIP	4	AG PLATED	FINISH					
4	TERMINAL	BRASS STRIP	16	AG PLATED	SEE NOTE					
3	BASE	PHENOLIC RESIN	1	NATURAL	DR: Ricky 2016/07/15		SCALE: 1/1 REV. A CUSTOMER DRAWING			
2	FRAME	STEEL STRIP	1	NI PLATED	CHKD: Ricky 2016/07/15					
1	KNDB	POM	1	BLACK	Q'TY	APPD:				
ND.	PARTS	MATERIAL	Q'TY	FINISHING						