
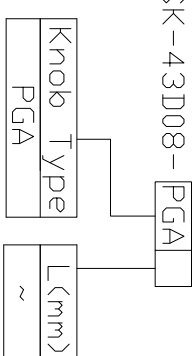
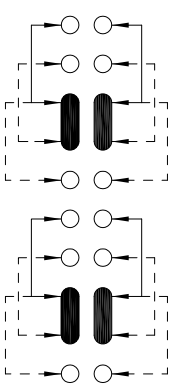
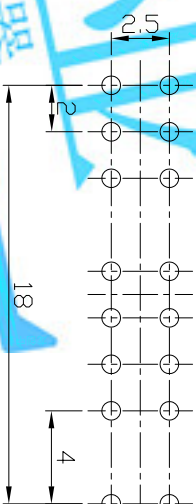


DIMENSIONS

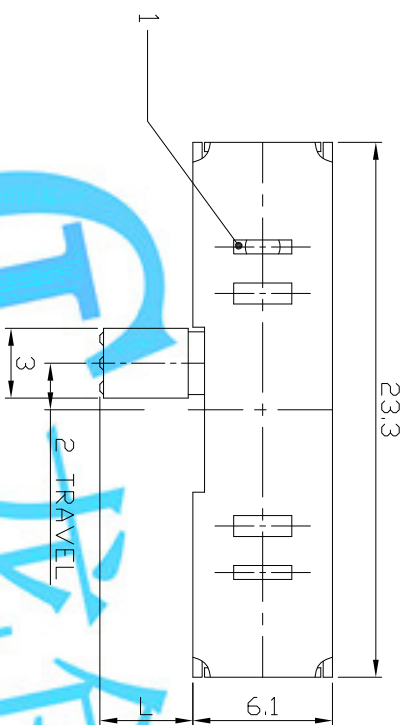

MODEL CODE



SK-43D08-PGA

Knob Type

PGA

$$\langle m m \rangle$$

2

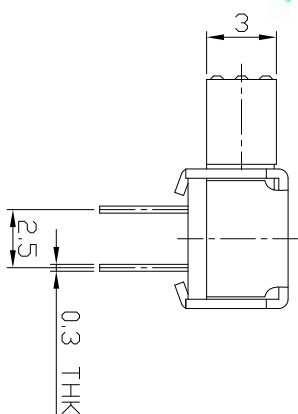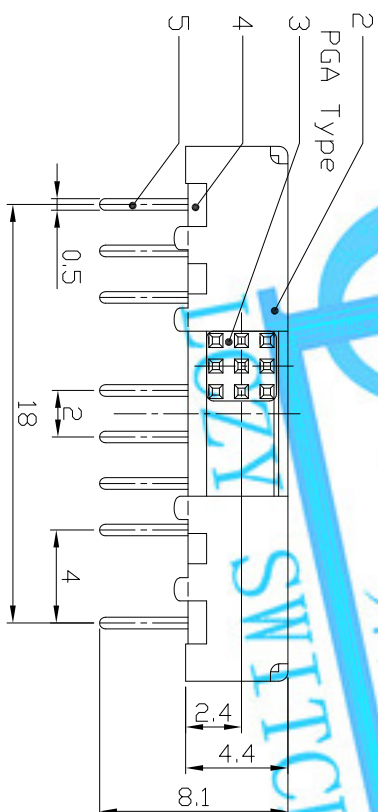

RATING	0.3A 50V DC
CIRCUIT	4P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

ELECTRO-MECHANICAL CHARACTERISTICS
Refer to additional specifications

P.C.B LAYOUT
BOTTOM VIEW

BOTTOM VIEW

CIRCUIT DIAGRAM

LONGCHUANG ZHONGYE (HK)CO.,LIMITED									
TITLE:			PART NO:		SK-43D08				
SLIDE SWITCH / HORIZONTAL									
SEE NOTE									
MATERIAL									
WITHIN 1.5mm: ±0.1mm					UNITS mm				
OVER 1.5mm: ±0.2mm									
8									
7									
6	CONTACT CLIP	PBS STRIP	4	AG PLATED					
5	TERMINAL	BRASS STRIP	16	AG PLATED					
4	BASE	PHENOLIC RESIN	1	NATURAL					
3	KNDB	POM	1	BLACK					
2	FRAME	STEEL STRIP	1	NI PLATED					
1	SPRING PLATE	PBS STRIP	1	NATURAL					
ND.	PARTS	MATERIAL	Q'TY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTECH INC.				
									
									
					DR: <i>Rocky</i> 2016/07/18	DWG NO: ADL-43D08			
					CHKD: <i>Rocky</i> 2016/07/18				
					APPD:	SCALE 3:1	SHEET 1/1	REV. A	CUSTOMER DRAWING