

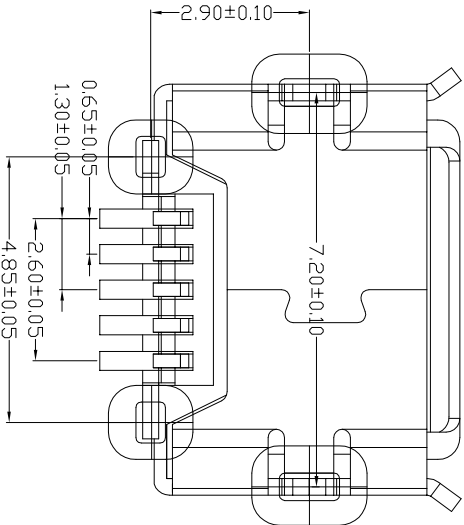
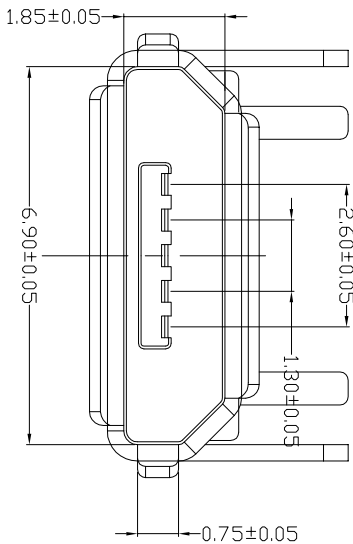
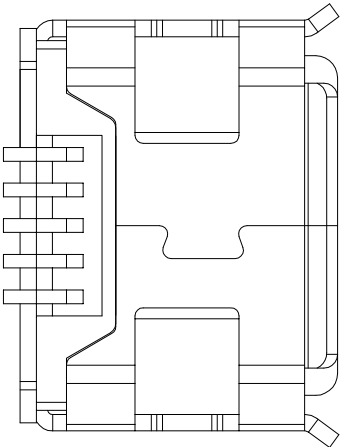


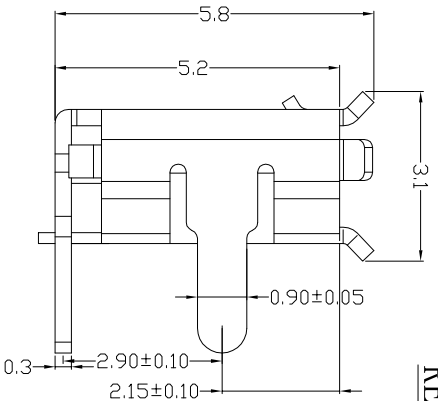

RECOMMENDED PCB LAYOUT

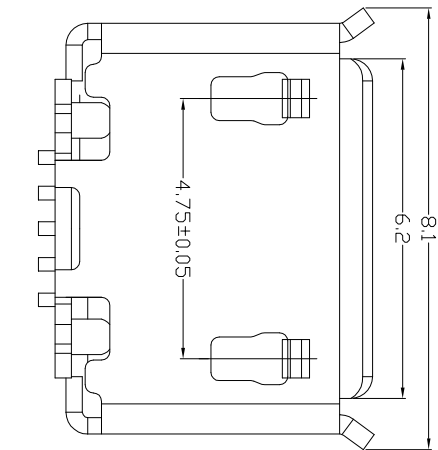



备注:
1. 产品规格:
1-1. 插入力: 35N MAX.
1-2. 拔出力: 10N MIN. INITIAL 8-20N AFTER 3000 CYCLES

1-3. 额定电流: 1.0A
1-4. 额定电压: 30V
1-5. 耐久性: 3000 CYCLES MIN.
1-6. 耐电压: 100V AC MIN.
1-7. 接触阻抗: 30mΩ MAX. INITIAL; 40mΩ MAX AFTER 3000 CYCLES

1-8. 绝缘电阻: 100MΩ MIN
1-9. 工作温度: -30° TO +80°
2. 材质:
2.1 胶芯: LCP UL94V-0
2.2 端子: C2680R-H, 镍底, 镀金GOLD
2.3 外壳: SUS
3. 所用材质须符合RoHS要求
4. 重点尺寸标识“▲”符号

1-8. 绝缘电阻: 100MΩ MIN
1-9. 工作温度: -30° TO +80°
2. 材质:
2.1 胶芯: LCP UL94V-0
2.2 端子: C2680R-H, 镍底, 镀金GOLD
2.3 外壳: SUS
3. 所用材质须符合RoHS要求
4. 重点尺寸标识“▲”符号

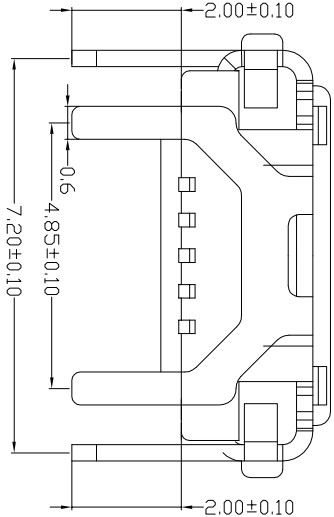

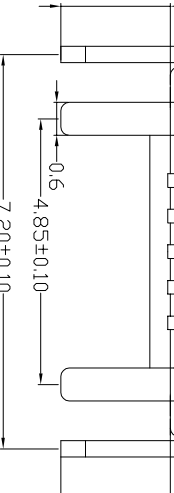				<table><tr><td>③</td><td>Shell</td><td>—</td><td>1</td><td>Phosphor Bronze</td><td>Sn Plated</td><td>—</td></tr><tr><td>②</td><td>Contact</td><td>—</td><td>5</td><td>Phosphor Bronze</td><td>Au Plated</td><td>—</td></tr><tr><td>①</td><td>Housing</td><td>—</td><td>1</td><td>LCP</td><td>Black</td><td>—</td></tr><tr><td>ITEM</td><td>PART NAME</td><td>TER'NO.</td><td>QTY.</td><td>MATERIAL</td><td>FINISHING</td><td>REMARK</td></tr></table>							③	Shell	—	1	Phosphor Bronze	Sn Plated	—	②	Contact	—	5	Phosphor Bronze	Au Plated	—	①	Housing	—	1	LCP	Black	—	ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
③	Shell	—	1	Phosphor Bronze	Sn Plated	—																																
②	Contact	—	5	Phosphor Bronze	Au Plated	—																																
①	Housing	—	1	LCP	Black	—																																
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK																																
APPROVALS		DATE		LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD																																		
DRAWN		S.L.L		2019.09.3																																		
CHECKED				TITLE:		USB CONNECTOR																																
APPROVALS				PART NO.		U-F-M5DD-Y-3																																
TOLERANCES ARE		30~0.1mm 10~0.30 5~0.10 ~ 5	±0.30 ±0.25 ±0.20 ±0.15	ANGLE		UNIT: mm SCALE: 1:1 PROJ: 																																
ECN NO.		REV.	DATE.	DESCRIPTION.		SHEET 1 OF 1																																
CHANGE.		CHECK.	APPRO.	NEW																																		